
## RP5 RUNPOTEC Polyester Ø 5,5 mm – incl. digital meter counter

optimal for pipe diameter 16-40 mm

Item no.: 10202 | 10203



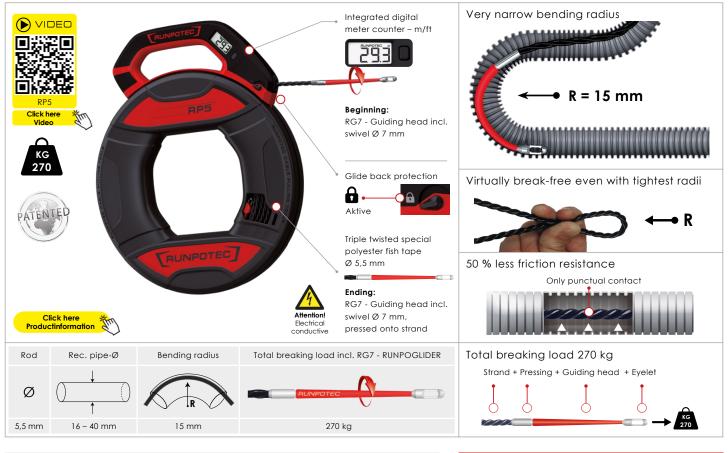

DATA		
ITEM NO.	10202	10203
LENGTH	20 m	30 m
WEIGHT	1,34 kg	1,65 kg
EAN-CODE	9120045477573	9120045477580
DIMENSION BOX	L 380 X W 310 X H 50 mm	
TOTAL BREAKING LOAD	270 kg (on the whole strap)	
ROD Ø	Ø 5,5 mm	
MATERIAL	triple twisted special polyester fish tape	
BENDING RADIUS	15 mm	
PIPE Ø	optimally from 16 mm - 40 mm	

## DESCRIPTION

The RP5 - RUNPOTEC Polyester Ø 5.5 mm is a cable pulling tool with digital meter counter. The triple-twisted special plastic tape with a diameter of 5.5 mm has an even better shearing effect than the 3 mm fiberglass rod; the frictional resistance is only half the normal value due to spot contact. The patented RG7 guiding head with swivel Ø 5.5 mm (pressed at the beginning and end of the tape) allows overcoming tight radii (bending radius 15 mm). The RP5 Ø 5.5 mm is stored in a jobsite suitable box incl. glide back protection. The unit of measurement of the metre counter can be changed from metric (m) to imperial (ft). The total breaking load of 270 kg refers to the entire pulling system. The cable pulling system is virtually breakage-free. The RP5 replacement strap cannot be stored in the box. Optimal field of application: for pipes with a diameter of Ø 16 mm - 40 mm. Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com. Scope of supply: 1 x RP5 RUNPOTEC Polyester Ø 5,5 mm with digital meter counter in a plastic box, including 2 x RG7 RUNPOGLEITER with swivel (pressed on both sides)

## **ADVANTAGES**

- Integrated digital meter counter
- Total breaking load 270 kg
- 2 x RG7 Guiding head with swivel Ø 7 mm
- Glide back protection
- Triple twisted special plastic tape
  Ø 5,5 mm
- 50 % less frictional resistance
- Virtually break-free, even with the tightest radii

