


CABLE DRUM SUMMARY TABLE

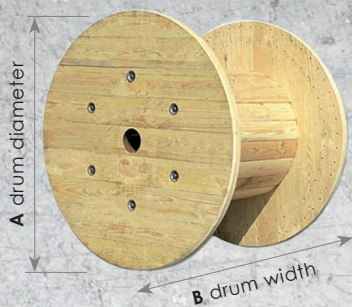

Application examples: Drum wavelengths for suitable drum widths

Length **1600 mm** for drum width **up to 1250 mm**

Length **1350 mm** for drum width **up to 1000 mm**

Length **1150 mm** for drum width **up to 800 mm**

A drum diameter mm	610	710	810	910	1010	1210	1410	1610	1810
B drum width mm	490	520	520	690	710	890	890	1100	1100
cable diameter mm	Cable lengths in m on a drum								
6	1113	2024	2755						
CAT5/6/7	7	845	1481	2340					
Coaxial	8	637	1064	1463	2731				
3 x 1,5 mm ²	9	472	892	1152	2202	2866			
3 x 2,5 mm ²	10	386	677	980	1768	2349			
5 x 2,5 mm ²	11	314	564	761	1404	1912			
1 x 25 mm ²	12	253	468	643	1206	1540			
	13	237	385	542	1032	1339	2727		
1 x 35 mm ²	14		364	454	881	1159	2265	2967	
7 x 2,5 mm ²	15		297	430	749	1000	1991	2479	
1 x 50 mm ²	16		239	358	632	860	1756	2205	
5 x 6 mm ²	17		226	294	603	736	1545	1959	
1 x 95 mm ²	18		218	281	505	705	1355	1737	
3 x 16 mm ²	19		172	228	485	599	1184	1535	2722
10 x 2,5 mm ²	20		165	219	402	576	1139	1352	2435
5 x 10 mm ²	21		159	211	387	485	991	1304	2172
4 x 16 mm ²	22		122	167	315	468	856	1145	1931
	23		117	161	304	389	827	999	1869
5 x 16 mm ²	24		113	156	294	377	709	967	1657
1 x 185 mm ²	25		110	151	285	365	688	639	1608
3 x 35 mm ²	26		80	116	226	299	668	814	1419
3 x 50 mm ²	27		78	113	221	290	567	700	1244
1 x 240 mm ²	28		76	109	215	282	551	681	1211
24 x 2,5 mm ²	29		73	106	209	226	462	663	1180
5 x 35 mm ²	30		71	103	162	220	450	564	1028
4 x 50 mm ²	31			76	157	214	438	550	1003
1 x 300 mm ²	32			74	153	209	428	537	866
40 x 2,5 mm ²	33			72	150	204	352	451	846
	34				146	158	344	441	828
3 x 95 mm ²	35				108	154	336	431	707
5 x 50 mm ²	36				105	151	329	422	692
4 x 70 mm ²	37				103	148	265	348	678
3 x 120 mm ²	38					144	259	341	664
	39					107	254	334	560
4 x 95 mm ²	40					105	249	327	549
5 x 70 mm ²	41					102	244	264	539
3 x 150 mm ²	42					100	190	259	529
4 x 120 mm ²	43						187	254	437
	44						183	249	430
	45						180	245	422
5 x 95 mm ²	46						177	240	415
3 x 185 mm ²	47						174	187	408
	48						129	184	330
4 x 120 mm ²	49						127	181	325
5 x 120 mm ²	50						125	178	319
	51						123	175	314
3 x 240 mm ²	52						121	172	310
	53							170	305
4 x 185 mm ²	54							126	230
	55							124	235
	56							122	232
	57							121	228
	58							119	225
5 x 150 mm ²	59							117	222
3 x 240 mm ²	60								219
	61								216

The cable examples shown correspond to the load capacity of the RUNPOLIFTER (less than 4500 kg).

Source: Leading cable dealers. All information are non-binding.