

# DATA SHEET



## REPLACEMENT GLASS FIBRE ROD

for steel cage Ø 4,5 mm

Item no.: 20311 | 20312 | 20313 | 20314 | 20315



### Repair instruction

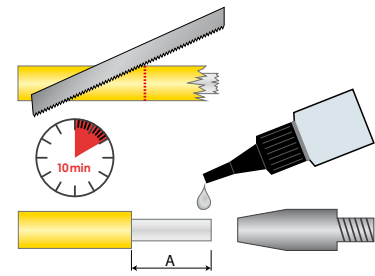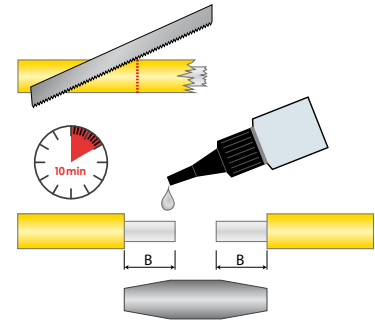

Ø mm	A	B
4,5 mm	15 mm	10 mm

### DATA

ITEM NO.	20311	20312	20313	20314	20315
LENGTH	30 m	40 m	50 m	60 m	80 m
WEIGHT KG	0,47	0,69	0,91	1,35	1,805
DIMENSION MM	L 400 / B 400 / H 60				
MATERIAL	Fiberglass core with PP sheath				
PIPE Ø	optimal for 30 - 80 mm				
TOTAL BREAKING LOAD	220 kg				
BENDING RADIUS	120 mm				

### ADVANTAGES

- Glass fibre rod total breaking load 1300 kg
- Total breaking load 220 kg
- Bending radius 120 mm

### Recommended tube diameter, bending radius and total breaking load fiberglass rod Ø 4,5 mm

Ø	Tube diameter	Bending radius R	Total breaking load	Total breaking load
4,5 mm	30 - 80 mm	120 mm	1300 kg	220 kg

### DESCRIPTION

Replacement glass fibre rod Ø 4.5 mm - RUNPOTEC RTG Ø 6 mm thread.  
Glass fibre rod - total breaking load 1300 kg, total breaking load 220 kg.

**Optimal field of application:** for pipe diameters 30 mm - 80 mm.

**Application video:** a short, very informative application video can be viewed by scanning the QR code or on [www.runpotec.com](http://www.runpotec.com).

**Scope of delivery:** 1 piece glass fibre rod Ø 4.5 mm with end sleeves (start/end)

### INFORMATION

**Suitable fiberglass rods Ø 4,5 mm (Lengths 30 - 80 Meter)**

**Profi Set Ø 4,5 mm**

10052/10055/10057/10047/10050

**Standard Set Ø 4,5 mm:**

10054/10056/10058/10048/10051

