

# DATA SHEET



## SPARE FIBERGLASS ROD

for POWER REX Ø 3mm

Item no.: **20413** | **20104** | **20105** | **20106**



### Repair instruction:

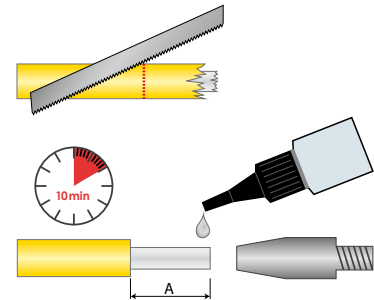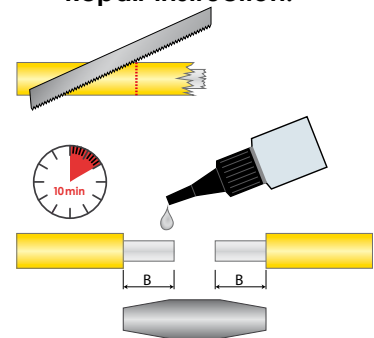

Ø mm	A	B
3 mm	12 mm	7 mm

### DATA

ITEM NO.	20413	20104	20105	20106
LENGTH	20 m	30 m	40 m	50 m
WEIGHT KG	0,24 kg	0,34 kg	0,45 kg	0,56 kg
MATERIAL	Fiberglass core with PP Sheath			
TOTAL BREAKING LOAD	120 kg			
BENDING RADIUS	55 mm			
TUBE DIAMETERØ	for pipe dimension 16 - 50 mm			
EAN-CODE	9120045474008	9120045474015	9120045474022	9120045474039

### ADVANTAGES

- Shear stability
- Also for coated pipes
- Bending radius 55 mm
- Total breaking load 120 kg

### Recommended tube diameter, bending radius and total breaking load of the POWER REX Ø 3 mm

Ø				
3 mm	16-50 mm	55 mm	450 Kg	120 Kg

### DESCRIPTION

Replacement glass fibre rod Ø 3 mm with end sleeve made of stainless steel RUNPOTEC RTG Ø 6 mm thread for POWER REX.

The specified total breaking load of 120 kg always refers to the entire product (glass fibre rod including end sleeves).

**Optimal field of application:** for pipe diameters 16 mm - 50 mm.

**Scope of delivery:** Replacement glass fibre rod Ø 3 mm incl. end sleeves with RUNPOTEC RTG Ø 6 mm thread

### INFORMATION

#### Suitable accessories:

**POWER REX Ø 3 mm**  
10087/10088/10089/10090

**Repair-Kit**  
20408



Click here Productinformation

Click here Productinformation